





Benchmark Inspections, Inc. P.O. Box 1523 Hobe Sound, FL 33475 Phone: 888-984-4484

E-mail:cplaia@benchmarkinspectionpros.com

Wind Mitigation

Turtle Creek Association #1 Inc. 11 SE Concourse Dr Tequesta, FL 33469 October 10, 2023

Report Summary:

1. Building Code: C. Built 1971

2. Roof Covering: A. All roof coverings listed meet FBC Product Approval

3. Roof Deck Attchment: C. 8d nail 6" Max Spacing

4. Roof to Wall Attachment: B. Clips

5. Roof Geometry: A. Hip Roof

6. SWR: **B. No SWR**

7. Opening Protection Credit: X.

8. Construction Type: 100% Concrete/Masonry - 0% Wood Frame - 0% Other

NOTICE: This Report is in accordance with the CLIENT AGREEMENT, and is subject to the terms and conditions agreed upon therein. Upon receiving this report, Client agrees that it has been read in its entirety. Our inspection and this report have been performed with a written client agreement that limits its scope and usefulness. Unauthorized recipients are therefore advised not to rely upon this report, but rather to retain the services of an appropriately qualified home inspector of their choice to provide them with their own evaluation and report. Please note that the wall construction type in the report is an estimate and is included as a courtesy to your insurance agent or carrier which is classified between masonry/concrete, wood frame and/or other wall construction types.

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

| Inspect | cion Date: October 10, 2023 | or and form and any | documentation prov | rided with the msurane | - poney |
|-----------------|--|---|--|---|--|
| | · Information | | | | |
| | Name: Turtle Creek Associati | on #1 Inc | | Contact Person: | |
| | s: 11 SE Concourse Dr | 0Π π Γ IIIO. | | Home Phone: | |
| | equesta | Zip: 33469 | | Work Phone: | |
| | ∕: Martin | 2.p. 00400 | | Cell Phone: | |
| | ice Company: | | | Policy #: | |
| | f Home: 1971 | # of Stories: 2 | | Email: | |
| | | | | | |
| accom though | : Any documentation used in pany this form. At least one part. The insurer may ask additional to the control of | hotograph must accomptional questions regardi | pany this form to validing the mitigated featu | late each attribute marked re(s) verified on this form | d in questions 3 |
| | ilding Code: Was the structure HVHZ (Miami-Dade or Browa | rd counties), South Florid | la Building Code (SFBC | C-94)? | |
| | A. Built in compliance with the a date after 3/1/2002: Building | Permit Application Date | (MM/DD/YYYY) | | |
| | B. For the HVHZ Only: Built i provide a permit application w | | | | |
| \boxtimes | C. Unknown or does not meet | | | | |
| OR | of Covering: Select all roof cov Year of Original Installation/Rering identified. | | | | nce for each roof |
| | 2.1 Roof Covering Type: | Permit Application Date | FBC or MDC Product Approval # | Year of Original Installation or Replacement | No Information Provided for Compliance |
| | 1. Asphalt/Fiberglass Shingle | | | | |
| | 2. Concrete/Clay Tile | 08/06/08 | 2008080384 | 2008 | |
| | 3. Metal | | | | $\overline{\sqcap}$ |
| | 4. Built Up | | | | |
| | ■ 5. Membrane | 08/06/08 | 2008080384 | 2008 | |
| | 6. Other | | | | |
| | 6. Other | | | | Ш |
| \square | A. All roof coverings listed ab- installation OR have a roofing B. All roof coverings have a M roofing permit application afte | permit application date of liami-Dade Product Appr | n or after 3/1/02 OR the oval listing current at time | e roof is original and built in me of installation OR (for t | n 2004 or later. he HVHZ only) a |
| | C. One or more roof coverings | do not meet the requirem | nents of Answer "A" or | "B". | |
| | D. No roof coverings meet the | requirements of Answer | "A" or "B". | | |
| 3. Ro | of Deck Attachment: What is t | he weakes t form of roof o | deck attachment? | | |
| | A. Plywood/Oriented strand bo by staples or 6d nails spaced a shinglesOR- Any system of mean uplift less than that requi B. Plywood/OSB roof sheathin 24"inches o.c.) by 8d common | oard (OSB) roof sheathing at 6" along the edge and screws, nails, adhesives, ared for Options B or C be- ing with a minimum thick | g attached to the roof tru 12" in the fieldOR- I other deck fastening sys elow. ness of 7/16"inch attach | Batten decking supporting vitem or truss/rafter spacing med to the roof truss/rafter (s | wood shakes or wood that has an equivalent spaced a maximum of |
| _ | other deck fastening system or a maximum of 12 inches in the | truss/rafter spacing that is field or has a mean upli | is shown to have an equ ft resistance of at least 1 | ivalent or greater resistance 103 psf. | e than 8d nails spaced |
| X | C. Plywood/OSB roof sheathin 24"inches o.c.) by 8d common decking with a minimum of 2 | nails spaced a maximun nails per board (or 1 nail | n of 6" inches in the fie per board if each board | ldOR- Dimensional lumb is equal to or less than 6 in | per/Tongue & Groove |
| Inspec | tors Initials <u>CP</u> Property A | ddress_ 11 SE Concour | se Di Tequesta, FL 3 | J403 | |
| | | | | | |

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

| position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access 5. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: sq ft; Total roof area has a roof slope of less than 2:12.12, Roof area with slope less than 2:12.12, sq of area with slope less than 2:12.1 | | | | of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least |
|---|-----|----------|---|---|
| F. Unknown or unidentified. G. No attic access. | | | - | ed Concrete Roof Deck. |
| G. No attic access. | | | E. Other: | |
| 4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within 5 lect of the inside or outside corner of the roof in determination of WEAKEST type) A. Toe Nails Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or determination of requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D, All visible metal connectors are: Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a 15" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, and free of visible severe corrosion. C. Single Wraps Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal Connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond bean, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side. D. Structural Anchor bolls structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access 8. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof | | | F. Unknown | or unidentified. |
| 5 feet of the inside or outside corner of the roof in determination of WEAKEST type) A. Toe Nails Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D, All visible metal connectors are: Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips Metal connectors that do not wrap over the top of the truss/rafter, and free of visible severe corrosion. Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter or a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Bouble Wraps Metal Connectors consisting of a single strap that wraps over the top of the truss/rafter or leaded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter or leaded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter or leaded in the bond both sides, and is secured to the top plate with a minimum of 1 nail on the opposing side. F. Structural An | | | G. No attic a | access. |
| Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: | 4. | | eet of the insid | e or outside corner of the roof in determination of WEAKEST type) |
| the top plate of the wall, or Metal connectors that do not meet the minimal conditions or requirements of B, C, or D Minimal conditions to qualify for categories B, C, or D, All visible metal connectors are: | | Ш | A. Toe Nails | |
| Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are: | | | | |
| Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips | | | | Metal connectors that do not meet the minimal conditions or requirements of B, C, or D |
| Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. Attached to the wall top plate of the wall framing, or embedded in the bond beam, and free of visible severe corrosion. Attached to the wall to not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps | | Mir | nimal conditio | ons to qualify for categories B, C, or D. All visible metal connectors are: |
| the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion. B. Clips | | | \boxtimes | Secured to truss/rafter with a minimum of three (3) nails, and |
| Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails and is secured with a minimum of 1 nail on the opposing side, or Metal Connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the position of the least secured with a minimum of 1 nail on the position of the least secured with a minimum of 1 nail on the position of the least secured with a minimum of 1 nail on the least secured with a nail on the least secured with a nail on the least secur | | | \boxtimes | the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe |
| Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 1 nail on the opposing side, or Metal Connectors consisting of 2 separate straps that are attached on the opposing side, or Metal Connectors consisting of 2 separate straps that are attached on the opposing side, or Metal Connectors consisting of 2 separate straps that are attached on the opposing side, or oppos | | \times | B. Clips | |
| position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural | | | | Metal connectors that do not wrap over the top of the truss/rafter, or |
| Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side. D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access 5. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter: 425 feet Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft C. Other Roof Any roof that does not qualify as either (A) or (B) above. 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event | | | \boxtimes | Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails. |
| D. Double Wraps Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access S. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter: 425 feet Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | | | C. Single W | Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a |
| Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access S. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). X A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter: 425 feet Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft C. Other Roof Any roof that does not qualify as either (A) or (B) above. 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. | | П | D. Double V | |
| Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof. F. Other: G. Unknown or unidentified H. No attic access Metal connectors of shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter: 425 feet B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft C. Other Roof Any roof that does not qualify as either (A) or (B) above. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | | | | Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with |
| F. Other: | | | | Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on |
| G. Unknown or unidentified H. No attic access 5. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). ✓ A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: 0 feet; Total roof system perimeter: 425 feet ✓ B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12. Roof area with slope less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total roof area may a roof slope of less than 2:12 gq ft; Total ro | | | | • |
| H. No attic access 5. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). ∠ A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: | | Ħ | | |
| the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification). A. Hip Roof | | | | |
| Total length of non-hip features: O feet; Total roof system perimeter: 425 feet Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft C. Other Roof Any roof that does not qualify as either (A) or (B) above. 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | 5. | | | |
| □ B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft □ C. Other Roof Any roof that does not qualify as either (A) or (B) above. 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) □ A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. ☑ B. No SWR. □ C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | | X | A. Hip Roof | |
| C. Other Roof Any roof that does not qualify as either (A) or (B) above. 6. Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. ☑ B. No SWR. ☐ C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | | | B. Flat Roof | Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of |
| A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 | | | C. Other Roo | |
| | 6. | Sec | A. SWR (also sheathing dwelling) B. No SWR. | so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss. |
| | Ins | spec | tors Initials _ | CP Property Address 11 SE Concourse Dr Tequesta, FL 33469 |
| *I his verification form is valid for up to five (5) years provided no material changes have been made to the structure or | *T | his v | verification fo | orm is valid for up to five (5) years provided no material changes have been made to the structure or |

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Opening Protection Level Chart Glazed Openings** Openings Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Garage Glass Entry Garage or Entry Skylights form of protection (lowest row) for any of the Glazed openings and indicate **Doors Block** Doors **Doors** Doors the weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable- there are no openings of this type on the structure Α Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) В Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) С Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E D 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified Ν Other protective coverings that cannot be identified as A, B, or C No Windborne Debris Protection Х A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). Miami-Dade County PA 201, 202, and 203 Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 Southern Standards Technical Document (SSTD) 12 For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist LA.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): ASTM E 1886 and ASTM E 1996 (Large Missile - 4.5 lb.) SSTD 12 (Large Missile – 4 lb. to 8 lb.) For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above L C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). LC.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist LC.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials CP Property Address 11 SE Concourse Dr Tequesta, FL 33469

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

| N. Exterior Opening Protection (unverified shutter s protective coverings not meeting the requirements of Ar with no documentation of compliance (Level N in the ta | nswer "A", "B", or C" or systems that | |
|---|--|---|
| N.1 All Non-Glazed openings classified as Level A, B, C, o | / | Lonenings evist |
| N.2 One or More Non-Glazed openings classified as Level 1 table above | | • • |
| N.3 One or More Non-Glazed openings is classified as Leve | el X in the table above | |
| X. None or Some Glazed Openings One or more Glazed | ed openings classified and Level X in | n the table above. |
| MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi | ~ | |
| Qualified Inspector Name: CHARLIE PLAIA | License Type: HOME INSPECTOR | License or Certificate #: HI 4860 |
| Inspection Company: BENCHMARK INSPECTIONS, INC | Phone: 88 | 38-984-4484 |
| Qualified Inspector – I hold an active license as a | : (check one) | |
| Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board | es who has completed the statutory numb and completion of a proficiency exam. | er of hours of hurricane mitigation |
| Building code inspector certified under Section 468.607, Florida | | |
| General, building or residential contractor licensed under Section | | |
| Professional engineer licensed under Section 471.015, Florida St | | |
| Professional architect licensed under Section 481.213, Florida St | | |
| Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute. | | perly complete a uniform mitigation |
| Individuals other than licensed contractors licensed under under Section 471.015, Florida Statues, must inspect the structure Licensees under s.471.015 or s.489.111 may authorize a direct experience to conduct a mitigation verification inspection. I, CHARLIE PLAIA am a qualified inspector a (print name) contractors and professional engineers only) I had my employed and I agree to be responsible for his/her work. Qualified Inspector Signature: | ructures personally and not througect employee who possesses the required in a personally performed the insp | th employees or other persons. Juisite skill, knowledge, and |
| An individual or entity who knowingly or through gross ne subject to investigation by the Florida Division of Insuranc appropriate licensing agency or to criminal prosecution. (S certifies this form shall be directly liable for the misconduc performed the inspection. | e Fraud and may be subject to adn ection 627.711(4)-(7), Florida Statu | ninistrative action by the ttes) The Qualified Inspector who |
| <u>Homeowner to complete</u> : I certify that the named Qualified residence identified on this form and that proof of identification | | |
| Signature:I | Date: 10/10/2023 | |
| An individual or entity who knowingly provides or utters a obtain or receive a discount on an insurance premium to w of the first degree. (Section 627.711(7), Florida Statutes) | | |
| The definitions on this form are for inspection purposes on as offering protection from hurricanes. | ly and cannot be used to certify an | y product or construction feature |
| Inspectors Initials CP Property Address 11 SE Concour | se Dr Tequesta, FL 33469 | |
| *This verification form is valid for up to five (5) years prov | ided no material changes have bee | n made to the structure or |

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 4 of 4





Front Elevation



Rear Elevation



8d Nails



Right Elevation



Left Elevation



19/32" Sheathing

Click any of the results below to view more details.

Showing 11-20 of 20 | Download results

| 0 | ilig 11-20 01 20 | | | | | | | | | |
|---|---------------------|------------------|---|--|------------|---------------|-------------------------------|---|--------------------|-----------------|
| | Application Date | Record Number | Record Type | <u>Address</u> | Action | <u>Status</u> | <u>Project</u> <u>Name</u> | Description | Expiration Date | Kiva Hist T# |
| | 03/29/2012 | BELCT134114 | Commercial Electrical | 11 SE CONCOURSE DR, F, JUPITER FL 33469-1540 | | CNCL | | Gneral electric as per plan | | T134114 |
| | 02/03/2012 | BELC2012040675 | Commercial Electrical | 11 SE CONCOURSE DR, F, JUPITER FL 33469-1540 | | DONE | | Miscellaneous electrical application: Install a new electrical panel | | T132625 |
| | 09/16/2009 | BREP2009090277 | Residential Replacement Windows/Doors | 11 SE CONCOURSE DR, D, JUPITER FL 33469-1540 | | DONE | | INSTALL 3 METAL DOORS | | T112702 |
| | 08/03/2009 | BAC2009080072 | Heating-A/C- Refrig Residential Changeout | 11 SE CONCOURSE DR, A, JUPITER FL 33469-1540 | | DONE | | REPLACE A/C UNIT WITHOUT DUCT REPLACEMENT FOR (RESIDENTIAL /) BUILDING. | | T111997 |
| | 01/27/2009 | BREP2009010318 | Residential Replacement Windows/Doors | 11 SE CONCOURSE DR, A, JUPITER FL 33469-1540 | | DONE | | INSTALL FIBERGLASS DOORS; INSTALL WINDOWS | | T108510 |
| | 08/06/2008 | BRR2008080384 | Residential Roofing | 11 SE CONCOURSE DR, D, JUPITER FL 33469-1540 | | DONE | TURTLE CREEK | RE ROOF TILE & FLAT- BUILDING 11- COMMERCIAL | | T105993 |
| | 06/19/2007 | BSHU2007060473 | Residential Shutters | 11 SE CONCOURSE DR, A, JUPITER FL 33469-1540 | | DONE | | INSTALL 6 ACCORDION SHUTTERS | | T97006 |
| | 02/22/2007 | BSHU2007020519 | Residential Shutters | 11 SE CONCOURSE DR, F, JUPITER FL 33469-1540 | | DONE | | INSTALL ACCORDION SHUTTERS ON 8 OPENINGS | | Т93956 |
| | 01/22/2007 | BSHU2007010480 | Residential Shutters | 11 SE CONCOURSE DR, B, JUPITER FL 33469-1540 | | DONE | | install 5 openings of accordion shutters | | T93191 |
| | 05/30/2001 | BMIC2001060253 | Commercial Miscellaneous | 11 SE CONCOURSE DR, D, JUPITER FL 33469-1540 | | DONE | | balcony repair (concrete) | | |
| | | | | < Prev | <u>1</u> 2 | Next > | | | | |

Martin County Florida Your County. Your Community.

2401 SE Monterey Road, Stuart, FL 34996

Phone (772) 288-5400





6" Max Spacing




6" Max Spacing



6" Max Spacing



Clips

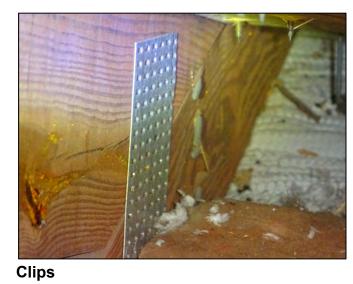



Truss 24" O.C.





Building 11